


ELECTRIC FAN HEATER

# REM 3,3 ECA



## FUNCTIONING PRINCIPLES

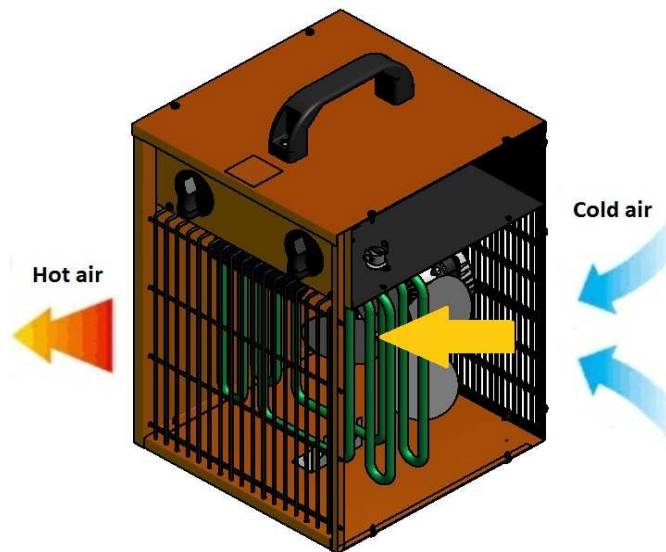

The device works on the principle of forced convection. The air flow is forced by a fan. Cold air is drawn in from the back of the unit. Further, as it flows from the heater, it receives heat. The heated air is expelled from the front of the heater. The device has a thermostat for the regulation of temperature 5-35 °C. The unit area equipped with thermal protection is acting automatically. The unit features: ventilation, heating with half the power, heating at full power.

## TECHNICAL DATA

Max capacity	kW	3,3	Power supply	V	230	
	Kcal/h	2866		Frequency	Hz	50
	Btu/h	11260				
Combustible	Power		Rated current	A	14,5	
Net weight	kg	5,3				
Gross weight	kg	6,1				
Noisy	dBa	58				
Air displacement	m <sup>3</sup> /h	288				

## PACKING

Dimensions packing	mm	305x305x440
Dimensions utilization	mm	255x260x400
Pieces for Europallet	n°	48
Pieces full truck	n°	1584

## COMPONENTS

Heating elements	1650W
Thermostat	Capillary
Fan	∅230mm
Thermal protection	85°C
Motor	Asynchronous, monophase, with impedance protection, counterclockwise rotation, 1300rpm

## ACCESSORIES

## WIRING DIAGRAM

L	:	Phase
N	:	Neutral
TV	:	Ambient thermostat
D	:	Heating element
T	:	Thermostat
M	:	Motor
K	:	Switch

