

# PX5000 230V 50HZ #AVR

ENGINEERED FOR PROFESSIONAL PERFORMANCE



Ready to move where power is needed, and configured with a strong and compact frame with integrated handle and wheels, that allow to transport it easily.

## Main Features

Frequency	Hz	50
Voltage	V	230
Power factor	cos $\phi$	0.9
Phase		1

## Power Rating

Emergency Standby Power ESP	kVA	4.2
Emergency Standby Power ESP	kW	3.8
Continuous power COP	kVA	3.9
Continuous power COP	kW	3.5

### Ratings definition (ISO-8528)

**ESP** - Emergency Standby Power:

It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

**COP** - Continuous Power:

It is defined as being the maximum power which a generating set is capable of delivering continuously for an unlimited number of hours, with the maintenance intervals and procedure being carried out as prescribed by the manufacturers.

### Engine specifications

Model		SR188F
Engine cooling system		Air
Displacement	cm <sup>3</sup>	389
Aspiration		Natural
Operating Speed-Nominal	rpm	3000
Speed governor		Mechanical
Fuel		Petrol
Oil capacity	l	1.1
Starting system		Recoil




### Alternator Specifications

Type		
Class		H
IP protection		23/44
Poles		2
Frequency	Hz	50
Voltage regulation system		Electronic
Standard AVR		✓



### Dimensional data

Length	(L) mm	727
Width	(W) mm	515
Height	(H) mm	670
Dry weight	kg	79
Fuel tank capacity	l	27

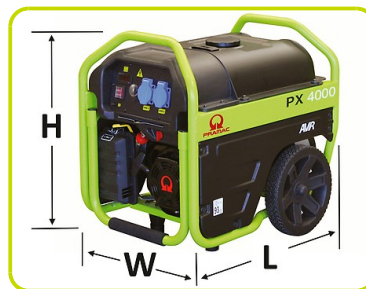

### Autonomy

Fuel consumption @ 75% PRP	l/h	1.44
Fuel consumption @ 100% PRP	l/h	1.92
Running time 75% PRP	h	18.75
Running time 100% PRP	h	14.06



### Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 m	dB(A)	69



## GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

### COMMANDS

- Selector switch: OFF - ON

### INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

### PROTECTIONS

- Thermal protection
- Oil Guard

### SOCKET TYPE

SCHUKO 230V 16A IP54	2
2P+T CEE 230V 16A IP44	1



The information is aligned with the Data file at the time of download. Printed on 08/12/2021 (ID 2314)

©2021 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package.  
Specifications subject to change without notice

