

# MP56-3

## MOTOR PUMPS - FOR CLEAN WATER




Self priming Petrol powered pumps to move large quantities of water, whether during flooding or simply filling a pond.

### Main Technical Data

Type	Semitrash	
Max suction head	m	8
Max Delivery Head	m	26
Delivery Volume	l/min	930

### Performance curve

Graph

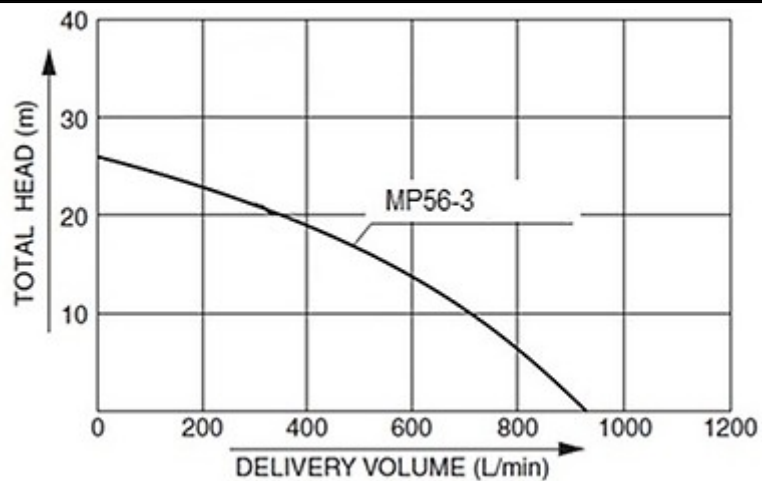

### Engine specifications

Engine Brand		Honda
Nr. of cylinder and disposition		1 inclination angle
Displacement	cm <sup>3</sup>	163
Fuel		Petrol
Starting system		Recoil



### Pump specifications

Manufacturer		KOSHIN
Inlet pipe diameter	'	3
Outlet pipe diameter	'	3
Max Solid Size	mm	-
Material for mechanical seal		Carbon Ceramic
Material for impeller		Cast Iron
Material for volute		Aluminum Die Cast

### Dimensional data

Length	(L) mm	477
Width	(W) mm	416
Height	(H) mm	466
Dry weight	kg	28

### Consumption, running time and noise

Fuel tank capacity	l	3.1
Running time	h	2.2
Noise level at 7 m	dB(A)	80
Guaranteed noise level (LWA)	dB(A)	105

### General equipment

Strainer	n°	1
Coupling Set	n°	2
Hose band	n°	3
Spark plug tool		Standard
Oil guard		Standard



### Accessories

Inlet pipes - length 8m		3"
Inlet pipes - length 25m		3"
Outlet pipes - length 10m		3"
Outlet pipes - length 50m		3"
Outlet pipes - length 100m		3"



The information is aligned with the Data file at the time of download. Printed on 02/11/2023 (ID 698)

©2023 | PR Industrial S.r.l unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

