

Safety Footwear

uvex multiple fit system

uvex multiple fit system

As part of the safety footwear multiple fit system, a footwear style is offered in the same size but in a range of different fits. The different fits are based on the measurement of the widest part of the foot. While the foot is under load, a measurement is taken of either the circumference of the foot at the base joint of the big toe and the base joint of the little toe, or alternatively the width of the foot at this point (see opposite).

The classification of sizes and the corresponding values are detailed in the table below (all measurements in mm):


uvex shoe size	Foot length	UK size	Width 10	Width 11 (standard)	Width 12	Width 14
35	210-217	3	216.5	222.5	228.5	240.5
36	218-225	3.5	221	227	233	245
37	226-232	4	225.5	231.5	237.5	249.5
38	233-240	5	230	236	242	254
39	241-247	6	234.5	240.5	246.5	258.5
40	248-255	6.5	239	245	251	263
41	256-262	7	243.5	249.5	255.5	267.5
42	263-270	8	248	254	260	272
43	271-277	9	252.5	258.5	264.5	276.5
44	278-285	10	257	263	269	281
45	286-292	10.5	261.5	267.5	273.5	285.5
46	293-300	11	266	272	278	290
47	301-307	12	270.5	276.5	282.5	294.5
48	308-315	13	275	281	287	299
49	316-322	14	279.5	285.5	291.5	303.5
50	323-330	14.5	284	290	296	308
51	331-337	15	288.5	294.5	300.5	312.5
52	338-345	16	293	299	305	317

All measurements in mm.


Anatomical circumference of the foot

Base joint of the big toe

Base joint of the little toe

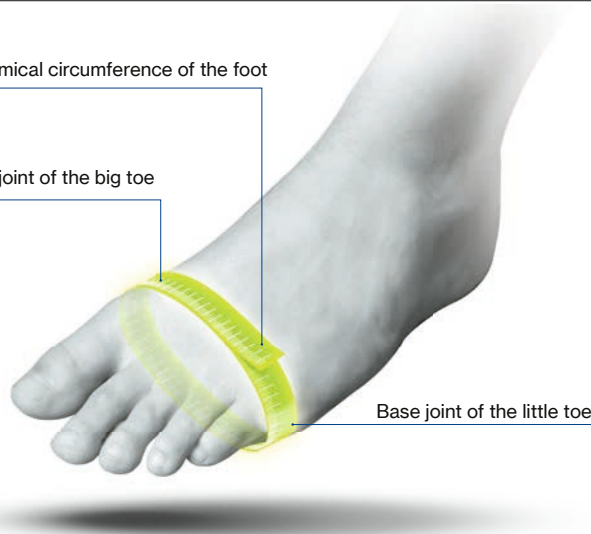

The required width can be determined from the table according to the wearer's foot length.

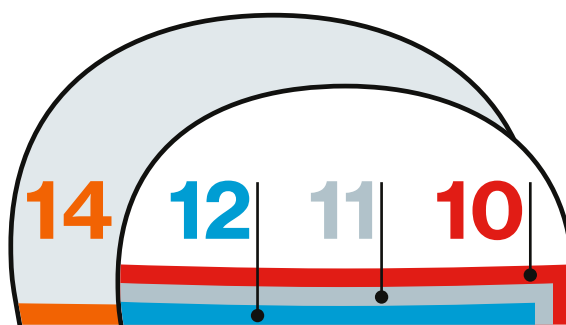

uvex fit advisor app

- User-friendly operation
- Automatic foot recognition
- Size and width recommendation
- Shoe recommendation based on the area of application
- Filter options in the footwear advisor



Find out how it works

